



PC1/GB03/00897



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport

South Wales
NP10 8QQ
REC'D 03 APR 2003

WIPO PCT

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

BEST AVAILABLE COPY

Signed *W. Behan*

Dated 17 March 2003

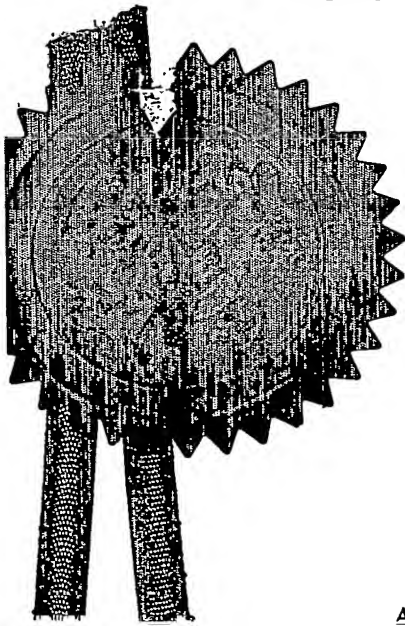

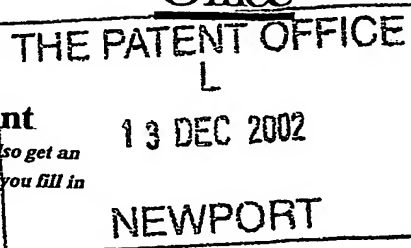

13DEC02 E770776-2 D02973
P01/7700 0.00-0229073.2

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference
SW/P016382
2. Patent application number
(The Patent Office will fill in this part)
0229073.2
13 DEC 2002
3. Full name, address and postcode of the or of each applicant (underline all surnames)
BEAUMONT, Terry
Far Mount Farm
Cumberworth
HD8 8YE
GB
Patents ADP number (if you know it)
If the applicant is a corporate body, give the country/state of its incorporation
83359 29001
4. Title of the invention
Sensing Device
5. Name of your agent (if you have one)
Harrison Goddard Foote
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)
Belgrave Hall
Belgrave Street
Leeds
LS2 8DD
Patents ADP number (if you know it)
14574001 7631310002
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority application number (if you know it)	Date of filing (day / month / year)
GB	0204887.4	1 March 2002
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (day / month / year)
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:
 - a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
See note (d))

Patents Form 1/77

Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 7

Claim(s)

Abstract

Drawing(s) 4 + 4

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

Harrison Goddard Foote

12 December 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Siobhan Ward

0113 233 0100

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

SENSING DEVICE

The present invention relates to a sensing device suitable for the non-invasive monitoring of physiological factors, the device being particularly suitable for location within the ear canal. The invention also relates to provision for duplex audio communication for use with said sensing device.

Systems for the monitoring of critical physiological factors are known. US 07/272,146 discloses the use of a nasal septum probe or oximeter. The application discloses the modified use of a nasal septum probe or oxisensor used with a conventional medical pulse oximeter. The nasal septum probe fits over a patient's nose bridge, or septum. The nasal septum oxisensor is modified to mount within the nose bridge portion of a conventional aircrew member face mask so that the blood oxygen saturation and pulse rate of the aircrew member can be monitored without any noticeable interference with, or extra effort by, the aircrew member.

A pulse oximeter calculates blood oxygen saturation from the different rates at which oxygenated haemoglobin and reduced haemoglobin absorb light of different wavelengths or frequencies. Typically, two wavelengths of light are used, one in the red portion of the spectrum and the other in the infra-red. Also typically, absorption of the infra-red wavelengths is much less sensitive to blood oxygen saturation levels than is absorption of the red wavelengths. The intensity of a particular infra-red wavelength remaining after passing through vascular tissue can serve as a constant against which to measure the intensity of a particular red wavelength remaining after passing through the same vascular tissue. Pulse rate is calculated from the timing of the relative rise and fall of the amount of light absorbed at each wavelength.

The pulse oximeter probe prior art has placed light emitting diodes (LEDs), and corresponding light sensors, over a variety of body appendages having sufficient vascular tissue. Such appendages include a finger, an ear pina, or ear lobe, the nasal septum as previously mentioned, and the scalp. The prior art refers to ear oximeters,

but in most cases it refers to oximeters using probes, or oxisensors, that mount across the ear lobe.

5 US 5,213,099 describes a sensing device comprising physiological sensing means in the form of a probe for measuring blood oxygen saturation level and a pulse monitor. The device comprises a means to locate the sensing means inside the ear canal. The device is specifically designed as a non-invasive, unobtrusive physiological monitor for a pilot or an aircrew member of high performance aircraft. Placement of the probe inside the relatively dark ear canal is greatly advantageous as it reduces
10 sensitivity to error from external light sources and allows measurement of blood oxygen saturation at a location as near as possible to the blood supply to the brain of an air-crew member. This is due to the fact that the main artery that supplies the brain also supplies the timpanic membrane. The device is incorporated as part of a protective ear plug already issued to aircrew members.

15 Since the device of US 5,213,099 effectively seals off the auditory meatus into which it is plugged, the user of the device suffers from various problems. These include an uncomfortable feeling of pressure in the ear canal, sweat in the ear, pollution by cerumen and loss of sound location when the auditory meatus is blocked off.

20 According to a first aspect of the present invention there is provided a sensing device comprising;

- a) physiological sensing means; and
 - b) locating means to locate the sensing means inside an ear canal
- 25 characterised in that the locating means is provided with an aperture which, when the sensing device is fitted in the ear canal, allows motion of the air in and out of the ear canal.

30 Placement of the device of the present invention inside the ear canal or auditory meatus has the important advantages of reduced sensitivity to error from external light sources and measurement of important parameters such as blood oxygen

saturation, heart rate, and body core temperature as near as possible to the blood supply to the brain of the wearer.

5 Preferably the locating means is substantially U-shaped and the aperture is defined by the trough between each arm of the U.

Preferably the locating means is made of pliable material and can be adapted to fit comfortably within the ear canal.

10 Preferably the locating means is provided with an adjusting means such that one device can be comfortably accommodated by a multiplicity of different users.

Most preferably the locating means is made of silicone or any other like material.

15 Preferably the locating means has a thermal conducting heat transfer tip.

Preferably the physiological sensing means comprises pulse oximetry optical transmitters and receiver.

20 Preferably the physiological sensing means also comprises a temperature sensor in contact with said heat transfer tip on the locating means.

Preferably the sensing device is provided with a securing means to secure the device to the ear of the user.

25

Preferably the securing means comprises an ear clip which partially or completely surrounds the ear.

The securing means may be designed to go around the top or bottom of the ear.

30

An alternative embodiment of the securing means is a custom made unit specifically to fit one ear of a particular user.

It will be appreciated that a means of audio communications between the user of the device and a person monitoring the physiological parameters will be desirable along with communication of physiological information and alarms for the wearer of the device.

Communication earpieces are known. US 5,659,620 (Kuhlman) describes an ear microphone which is adapted to be disposed and retained in the outer ear region, i.e., outside the auditory meatus. The device is suitable for use with portable telephones or radios.

The disclosure of US5,659,620 teaches away from the use a device which is designed for arrangement within the auditory meatus.

Embodiments of the present invention seek to provide a physiological monitor.

Accordingly the sensing device of the present invention may further comprise an audio communications means comprising a speaker and a microphone.

Preferably a multi-core cable connects the sensing device to an interface unit for transmission by radio or cable to an external recording and monitoring means.

Preferably the speaker is located within the aperture of the U-shaped locating means.

Preferably the microphone contacts the front part of the outer ear. Preferably the microphone is a bone microphone and collects vibrations transmitted by the jawbone which passes near the front part of the outer ear. These vibrations are generated in the throat and vocal cords of the user upon talking.

Preferably the microphone aperture is pneumatically connected to a bubble of air. When the device is in use, the air bubble makes contact with the tragus against which it is placed and transmits vibrations in the air within the bubble to a microphone.

Preferably the communications means and the locating means are formed as separate components, each component suitably adapted for reversible attachment with said other component. Reversible attachment facilitates general maintenance and cleaning of the sensing device. In an alternative embodiment the communication means is integral with the locating means.

Applications of a present device of the present invention include but are not restricted to use within the emergency, medical and military services. The device also has applications within the industrial sector for the monitoring of workers in hazardous areas.

Due to the nature of potential applications of the present device mentioned above, it will be apparent to one of skill in the art that full duplex communication, as opposed to merely simplex communication, is clearly desirable. It is known that for an ear microphone and speaker to be used for full duplex, sufficient separation between input and output must be present in order to avoid self-resonance. Although US5,659,620 makes reference to the advantage of a full duplex communication the described embodiment does not enable such levels of communication.

According to a second aspect of the present invention there is provided a communications means comprising;

- a) a speaker
- b) a microphone

characterised in that the speaker is located within a vibration absorbent material.

Preferably the speaker and/or the microphone are located within two layers of vibration absorbent material.

Preferably the surrounding enclosure for the speaker and microphone is a soft silicone sealant type material.

Preferably the location means is thermoplastic elastomer or thermoset silicone.

Preferably the location means vibration absorbing material has a sure hardness of 30 to 60 %

- 5 The absorbent materials serve to absorb vibrations emitted by the speaker and thus prevent transmittal of these vibrations to the microphone. Preferably the speaker is located partially within the inner auditory meatus thus increasing the distance between the speaker and the microphone. Accordingly the communication means of the present invention allows for full duplex communication.

10

The present invention is illustrated by the accompanying drawings wherein reference numerals 1 to 12 refer to the following earpiece parts:

- 1. earpiece body (lower)
- 15 2. venting aperture
- 3. infra-red & red transmitter
- 4. speaker
- 5. temperature sensor
- 6. microphone
- 20 7. U shaped locating means
- 8. optical sensors
- 9. microphone sound tube
- 10. microphone air bubble
- 11. ear piece body (upper)
- 25 12. multi-core cable

Figure 1 illustrates in plan view, the detail of the lower earpiece body (1) and U shaped locating means (7).

- 30 Figures 2 and 3 are perspective views and illustrate the aperture or groove provided by the U shaped locating means (7) and the location of the speaker (4) therewithin.

Figure 4 shows the assembled sensing device located in the inner ear of a user.

5

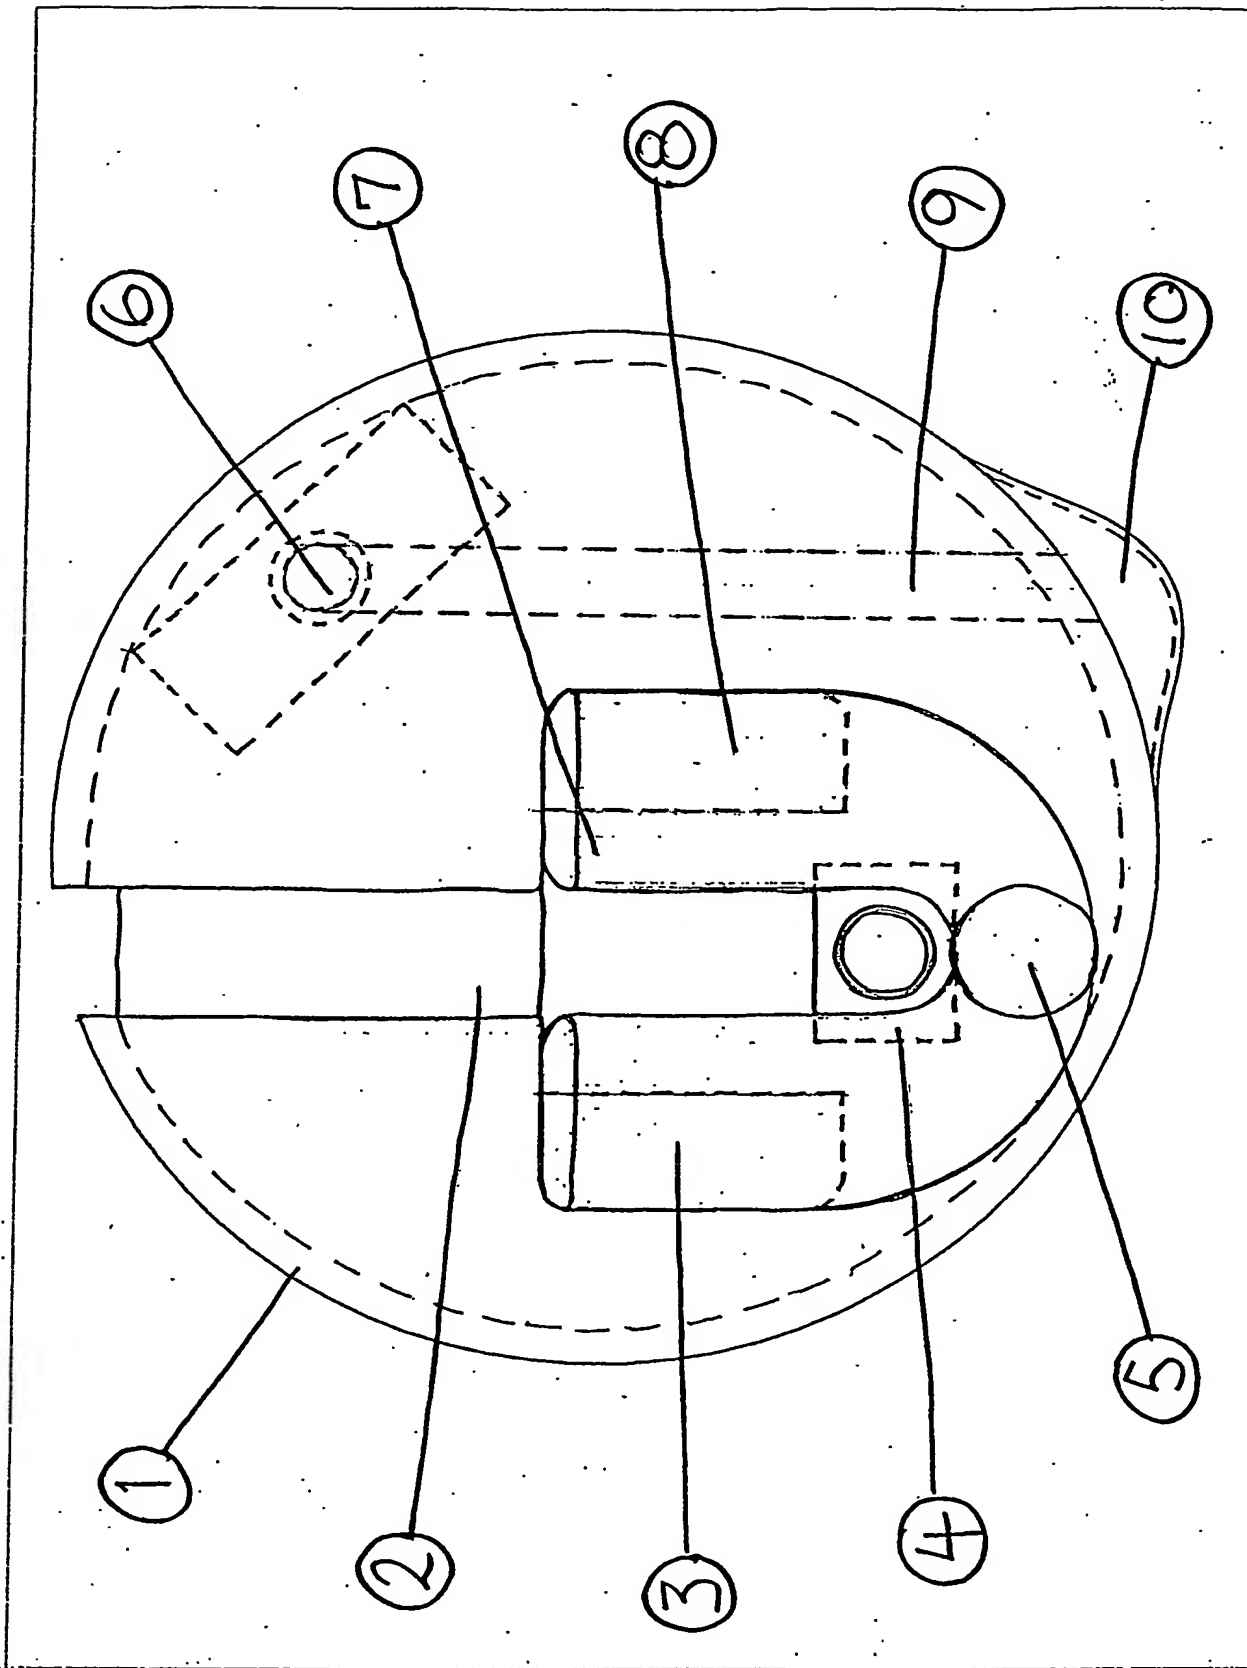


FIGURE 1.

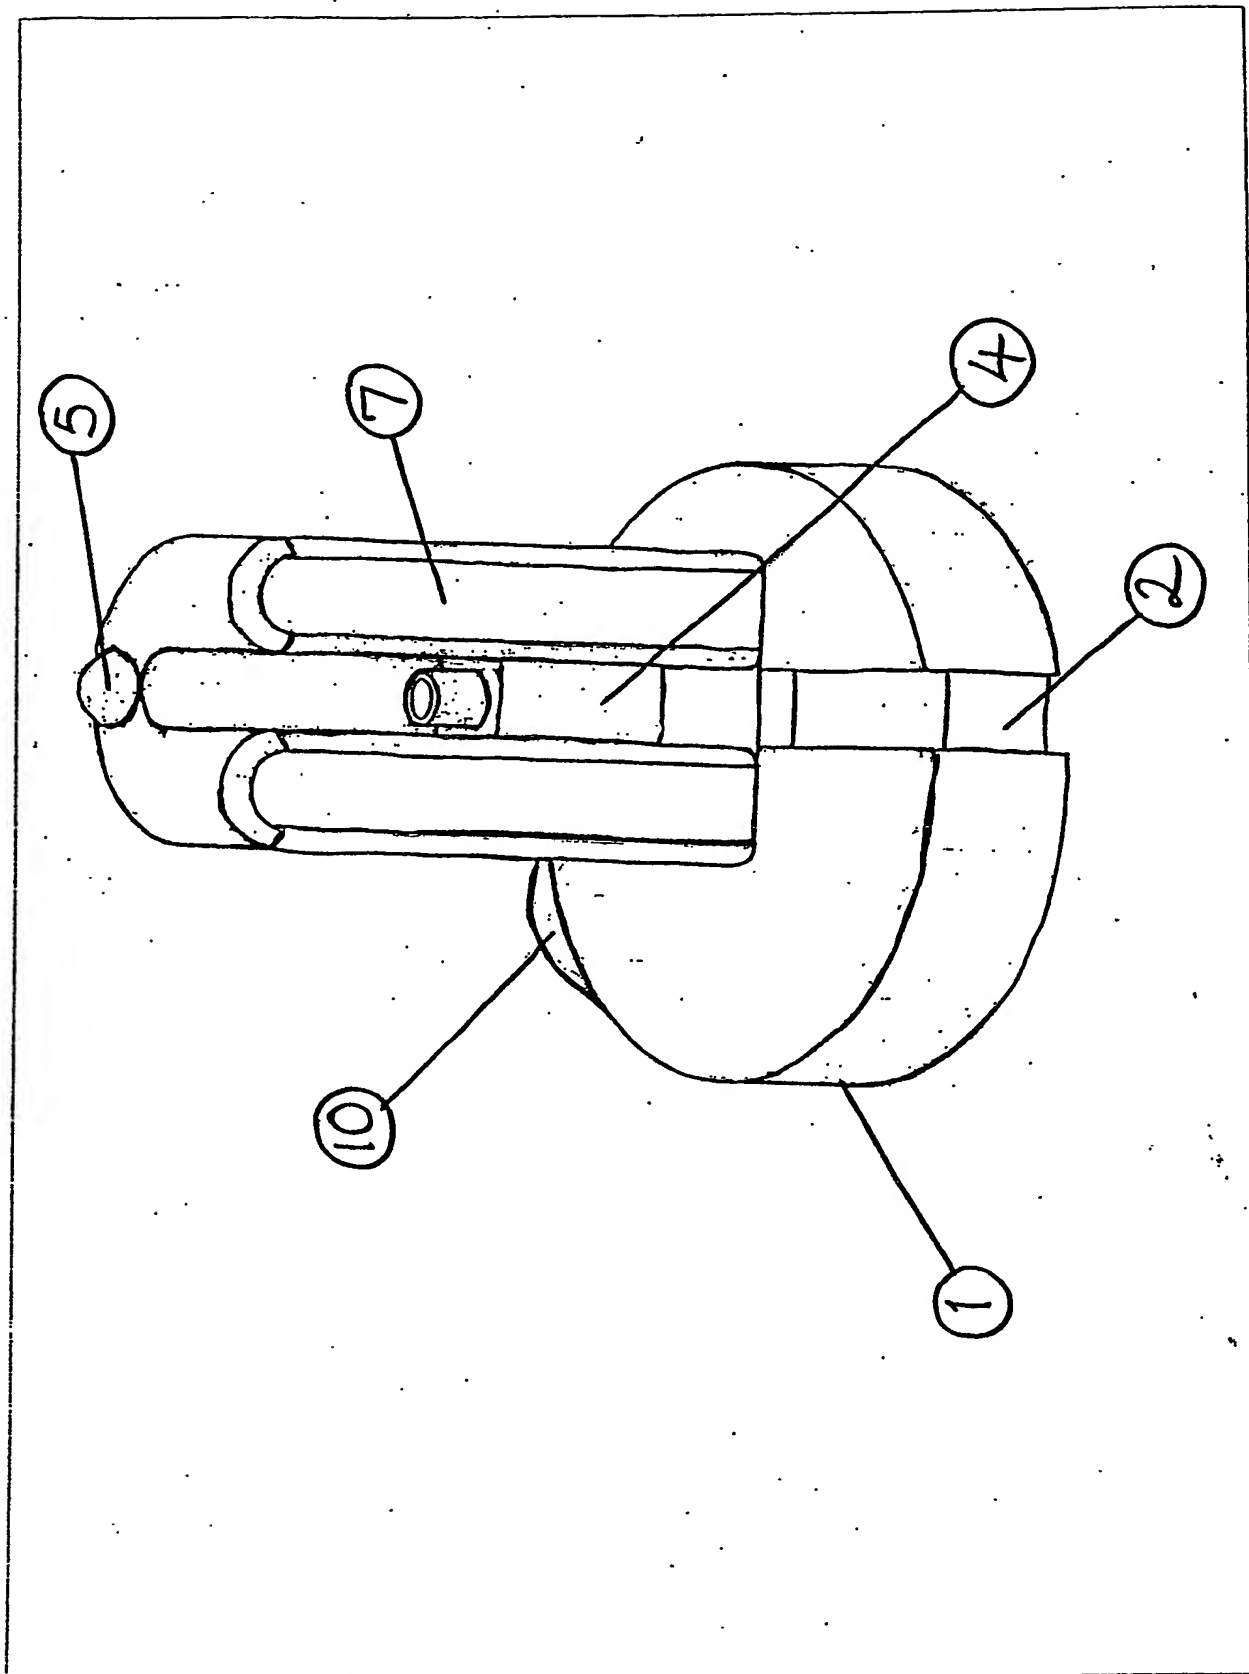


FIGURE 2.

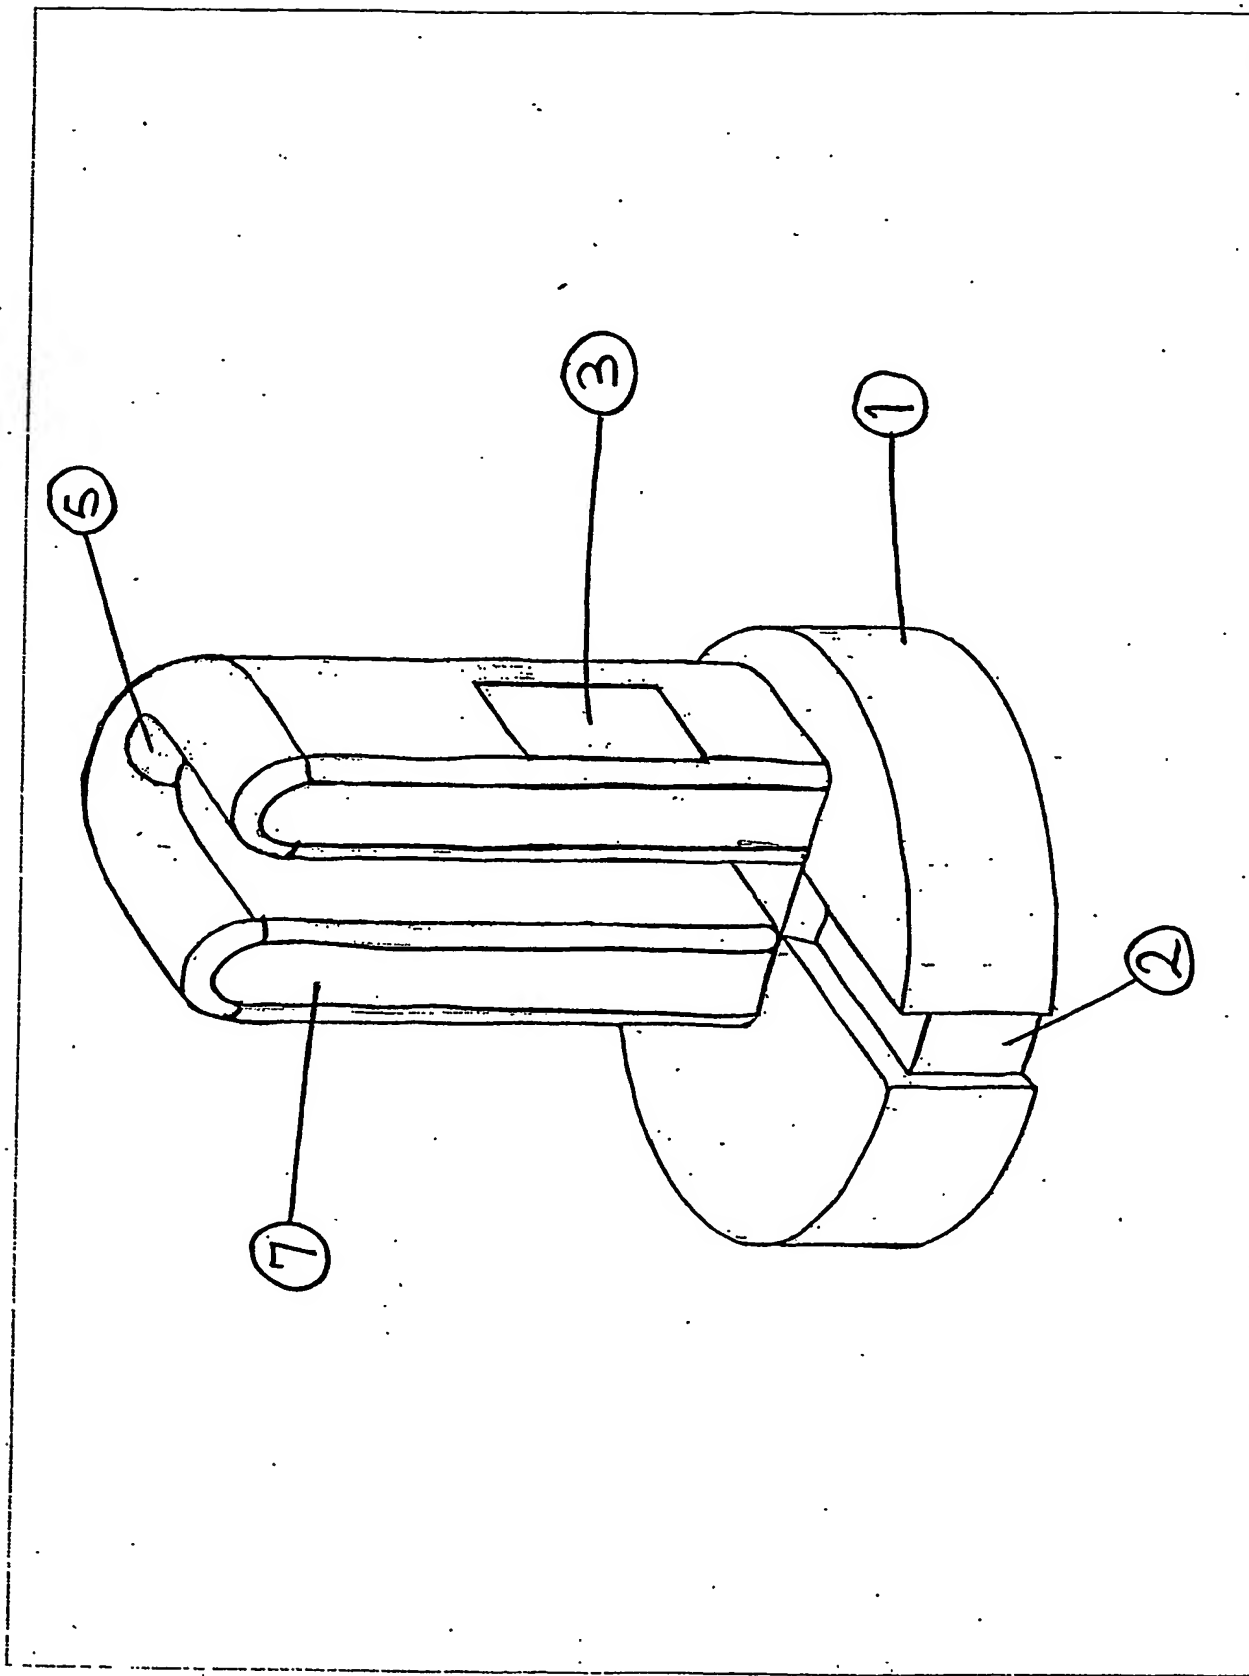


FIGURE 3.

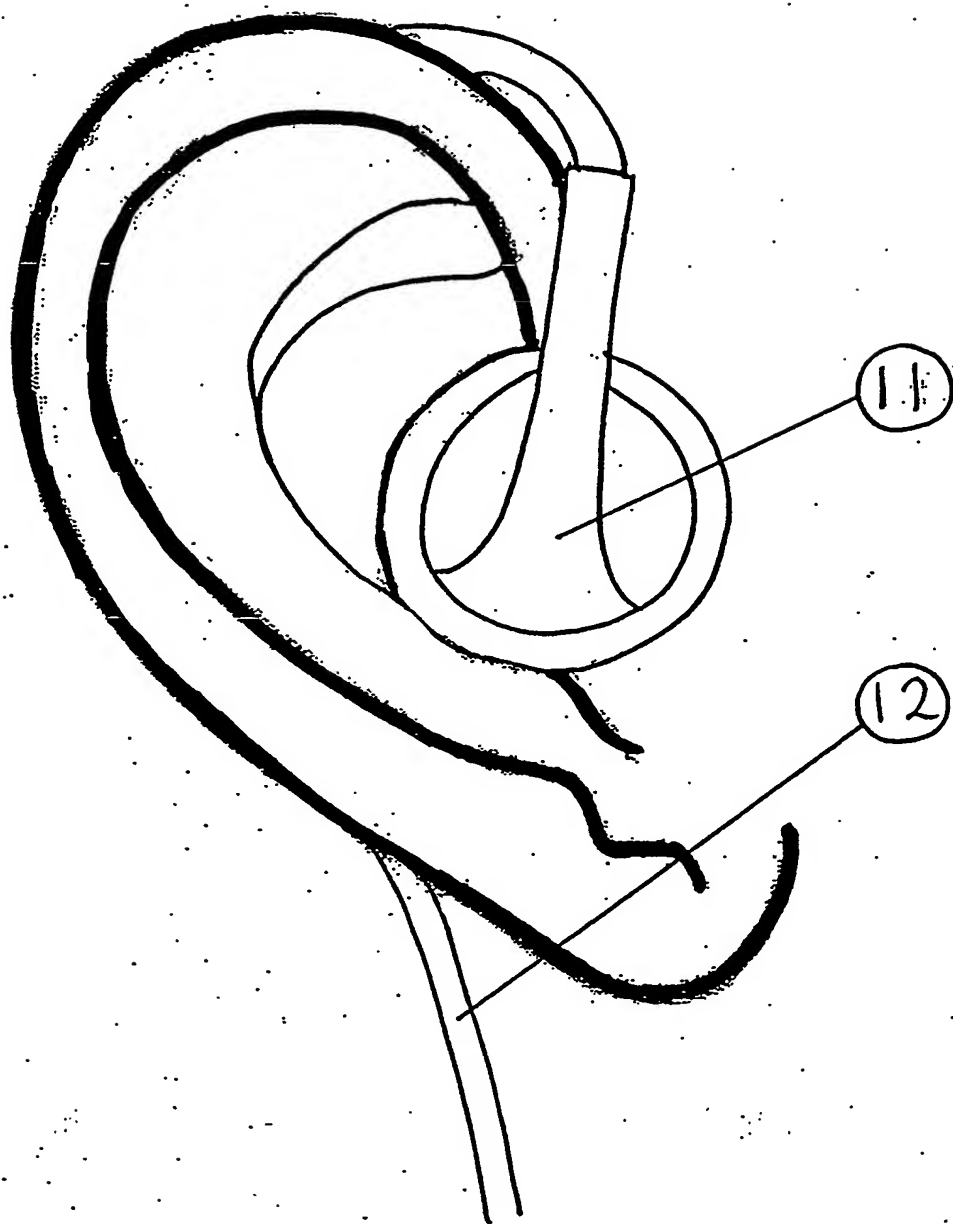


FIGURE 4.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☒ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.